



# CONTEG DATA SHEET

version: 27-7-2011

FREE STANDING RACKS

## RSG2 SERIES 19" OPEN FRAMES

### CONTEG, spol. s r.o.

Headquarters Czech Republic:  
Na Vítězné pláni 1719/4  
140 00 Prague 4

Tel.: +420 261 219 182  
Fax: +420 261 219 192  
[conteg@conteg.com](mailto:conteg@conteg.com)  
[www.conteg.com](http://www.conteg.com)

### Local Offices:

|                 |                   |
|-----------------|-------------------|
| Austria:        | +43 699 1819 7071 |
| Benelux:        | +32 477 957 126   |
| Eastern Europe: | +49 172 848 4346  |
| France:         | +33 686 074 386   |
| Germany:        | +49 170 523 4958  |
| Russia:         | +7 495 967 3840   |
| Slovakia:       | +421 917 874 111  |



RSG2 high-load two post open frames are designed to be used together with High Density Wire Managers. RSG2 open frames bring unbeatable accessibility. The RSG2 two post frames are available with two load ratings, depending on the type of equipment that you want to install. The 500kg rated frame is ideally suited to high density cabling applications, whereas the 1000kg rated frame is suited to the installation of heavier equipment. The frames are also suitable for use in testing and service rooms where they ensure unlimited access to components installed.

COLOR SAMPLER:

RAL 9005

DESCRIPTION:

Sizes

- Height: 27, 42, 45, 47U
- Width: 550mm
- Depth: 100mm

Construction

- 2.0mm sheet steel

Load rating

- 500kg (balanced load; all heights)
- 1000kg (balanced load; only 42, 45, 47U)

IP rating

- IP00 (no protection)

Color

- Standard RAL 9005

Base





- Produced from sheet steel
- Base comprises holes for anchoring screws

Standard equipment

- 1 pair of 19" vertical extrusions with U marking
- Top angles
- 2x base



RSG2-42-19-L5

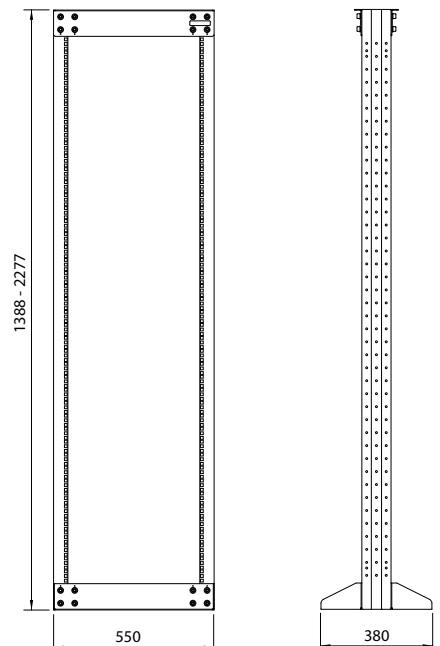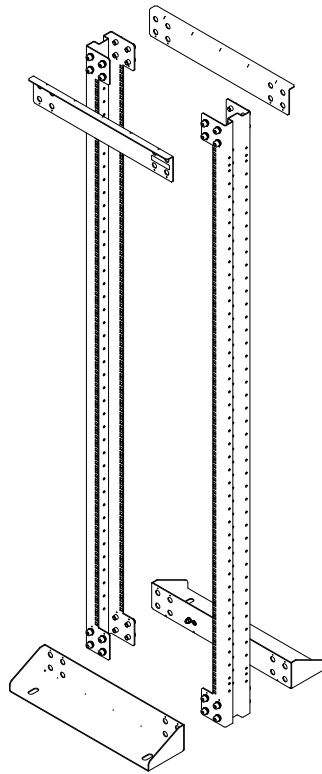

| Code          | H in U | H in mm | Load rating in kg |
|---------------|--------|---------|-------------------|
| RSG2-27-19-L5 | 27     | 1388    | 500               |
| RSG2-42-19-L5 | 42     | 2055    | 500               |
| RSG2-45-19-L5 | 45     | 2188    | 500               |
| RSG2-47-19-L5 | 47     | 2277    | 500               |
| RSG2-42-19-LA | 42     | 2055    | 1000              |
| RSG2-45-19-LA | 45     | 2188    | 1000              |
| RSG2-47-19-LA | 47     | 2277    | 1000              |

Note: All dimensions in mm